


RS滾子鏈 RS60

(JIS代號60)

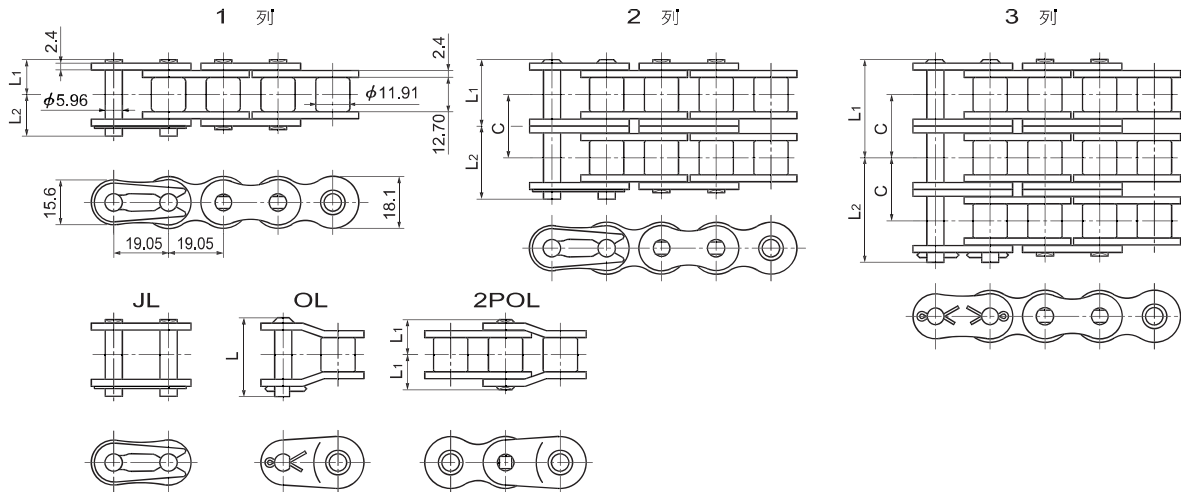

鏈條型號	列數	插銷長度 L1+L2	尺寸 L1	尺寸 L2	過渡節長度 L	橫向節距 C	插銷的 形式	JIS 抗拉強度 kN{kgf}	最小 抗拉強度 kN{kgf}	平均 抗拉強度 kN{kgf}	最大 容許張力 kN{kgf}	概略 重量 kg/m
RS60-1	1	27.6	12.85	14.75	28.2	22.8	鎖合形式 開口鎖形	31.3 {3192}	40.2 {4100}	44.1 {4500}	8.83 {900}	1.53
RS60-2	2	50.5	24.25	26.25	52.6			62.6 {6384}	80.4 {8200}	88.3 {9000}	15.0 {1530}	3.04
RS60-3	3	73.8	35.65	38.15	75.5			93.9 {9576}	121 {12300}	132 {13500}	22.1 {2250}	4.54
RS60-4	4	96.6	47.05	49.55	98.3		鉚合形式	-	161 {16400}	177 {18000}	29.1 {2970}	6.04
RS60-5	5	119.5	58.5	61.0	121.2			-	201 {20500}	221 {22500}	34.4 {3510}	7.54
RS60-6	6	142.4	69.9	72.5	144.0			-	241 {24600}	265 {27000}	40.6 {4140}	9.05

注) 1・1節距過渡鏈節 (OL) 其最大容許張力為上表的65%。2節距過渡鏈節 (2POL) 請按照上表資料使用。

2・1組鏈節數量=160 3・粗體字是以unit為單位有在庫品，細字是按單生產品

■ RS60-1傳動能力表<1列鏈條的傳動kW>

小 鏈 齒 數	潤 滑 形 式	小 鏈 輪 旋 轉 速 度 r/min																											
		10	25	50	100	150	200	300	400	500	600	700	800	900	1000	1100	1200	1400	1600	1800	2000	2500	3000	3500	4000	4500			
		A							B																	C			
9		0.24	0.55	1.02	1.90	2.73	3.54	5.10	6.61	8.08	9.52	10.1	10.1	10.1	8.6	7.46	6.54	5.19	4.25	3.56	3.04	2.18	1.66	1.31	1.08	0.90			
10		0.27	0.61	1.14	2.13	3.06	3.97	5.72	7.41	9.05	10.7	11.4	11.4	11.4	10.1	8.73	7.66	6.08	4.98	4.17	3.56	2.55	1.94	1.54	1.26	1.06			
11		0.30	0.68	1.26	2.36	3.40	4.40	6.34	8.21	10.0	11.8	12.7	12.7	12.7	11.6	10.1	8.84	7.02	5.74	4.81	4.11	2.94	2.24	1.78	1.45	1.22			
12		0.33	0.74	1.39	2.59	3.73	4.83	6.96	9.02	11.0	13.0	13.9	13.9	13.9	13.2	11.5	10.1	8.00	6.54	5.48	4.68	3.35	2.55	2.02	1.66	1.39			
13		0.36	0.81	1.51	2.82	4.07	5.27	7.59	9.83	12.0	14.2	15.2	15.2	15.2	14.9	12.9	11.4	9.02	7.38	6.18	5.28	3.78	2.87	2.28	1.87				
14		0.39	0.88	1.64	3.06	4.41	5.71	8.22	10.7	13.0	15.3	16.7	16.7	16.7	16.7	14.5	12.7	10.1	8.25	6.91	5.90	4.22	3.21	2.55	2.09				
15		0.41	0.95	1.77	3.30	4.75	6.15	8.86	11.5	14.0	16.5	18.5	18.5	18.5	18.5	16.0	14.1	11.2	9.15	7.66	6.54	4.68	3.56	2.83	2.31				
16		0.44	1.01	1.89	3.53	5.09	6.59	9.50	12.3	15.0	17.7	20.4	20.4	20.4	20.4	17.7	15.5	12.3	10.1	8.44	7.21	5.16	3.92	3.11	2.55				
17		0.47	1.08	2.02	3.77	5.43	7.04	10.1	13.1	16.1	18.9	21.7	22.3	22.3	22.3	19.4	17.0	13.5	11.0	9.25	7.90	5.65	4.30	3.41	2.79				
18		0.50	1.15	2.15	4.01	5.78	7.49	10.8	14.0	17.1	20.1	23.1	23.7	23.7	23.7	21.1	18.5	14.7	12.0	10.1	8.60	6.16	4.68	3.72	3.04				
19		0.53	1.22	2.28	4.25	6.13	7.94	11.4	14.8	18.1	21.3	24.5	25.1	25.1	25.1	22.9	20.1	15.9	13.0	10.9	9.33	6.68	5.08	4.03	3.30				
20		0.56	1.29	2.41	4.50	6.48	8.39	12.1	15.7	19.1	22.6	25.9	26.6	26.6	26.6	24.7	21.7	17.2	14.1	11.8	10.1	7.21	5.48	4.35					
21		0.59	1.36	2.54	4.74	6.83	8.84	12.7	16.5	20.2	23.8	27.3	28.0	28.0	28.0	26.6	23.3	18.5	15.2	12.7	10.8	7.76	5.90	4.68					
22		0.62	1.43	2.67	4.98	7.18	9.30	13.4	17.4	21.2	25.0	28.7	29.5	29.5	29.5	28.5	25.0	19.8	16.2	13.6	11.6	8.32	6.33	5.02					
23		0.64	1.50	2.80	5.23	7.53	9.76	14.1	18.2	22.3	26.2	30.1	30.9	30.9	30.9	30.5	26.7	21.2	17.4	14.6	12.4	8.89	6.76	5.37					
24		0.67	1.57	2.93	5.47	7.89	10.2	14.7	19.1	23.3	27.5	31.5	32.5	32.5	32.5	28.5	22.6	18.5	15.5	13.2	9.48	7.21	5.72						
25		0.70	1.64	3.07	5.72	8.24	10.7	15.4	19.9	24.4	28.7	33.0	34.5	34.5	34.5	30.3	24.0	19.7	16.5	14.1	10.1	7.66	6.08						
26		0.73	1.71	3.20	5.97	8.60	11.1	16.0	20.8	25.4	29.9	34.4	36.6	36.6	36.6	32.1	25.5	20.9	17.5	14.9	10.7	8.13	6.45						
28		0.78	1.86	3.47	6.47	9.31	12.1	17.4	22.5	27.5	32.4	37.3	40.9	40.9	40.9	35.9	28.5	23.3	19.5	16.7	11.9	9.09							
30		0.84	2.00	3.73	6.97	10.0	13.0	18.7	24.3	29.7	34.9	40.1	44.9	44.9	44.9	39.8	31.6	25.9	21.7	18.5	13.2	10.1							
32		0.90	2.14	4.00	7.47	10.8	13.9	20.1	26.0	31.8	37.5	43.0	48.1	48.1	48.1	43.9	34.8	28.5	23.9	20.4	14.6	11.1							
35		0.98	2.36	4.41	8.23	11.9	15.4	22.1	28.7	35.0	41.3	47.4	53.0	53.0	53.0	50.2	39.8	32.6	27.3	23.3	16.7	12.7							
40		1.12	2.73	5.09	9.50	13.7	17.7	25.5	33.1	40.5	47.7	54.8	61.3	61.3	61.3	61.3	48.7	39.8	33.4	28.5	20.4								
45		1.26	3.10	5.78	10.8	15.5	20.1	29.0	37.6	45.9	54.1	62.2	70.1	73.2	73.2	73.2	58.1	47.5	39.8	34.0	24.3								

注) 1・1節距過渡鏈節 (OL) 其傳動能力為上表的65%。2節距過渡鏈節 (2POL) 請按照上表資料使用。

2・若需以傳動能力表內黃色區塊的速度下使用，請諮詢本公司。

多列 係數	鏈條列數	2列	3列	4列	5列	6列	潤滑 形式	A	B	C	詳情 P199
		1.7	2.5	3.3	3.9	4.6		使用注油器或滴注加油	使用油浴或旋轉板潤滑	使用壓力泵潤滑	

使用前

標準傳動鏈條・鏈輪

無加油傳動鏈條

強力傳動鏈條

耐環境傳動鏈條

特殊傳動鏈條

鏈輪

滾子齒輪傳動

配件

滾子鏈的選定

滾子鏈・鏈輪的使用說明